

Preparation

Part Number: PTS22-34070

Kit Contents

Item #	Quantity Req.	Description
1	1	Accelerator Pedal
2	1	Brake Pedal
3	1	Installation Instructions

Hardware Bag Contents

Item #	Quantity Req.	Description
1		
2		
3		

Additional Items Required For Installation

Item #	Quantity Req.	Description
1		
2		
3		

Conflicts

--

Recommended Tools

Personal & Vehicle Protection	Notes
Vehicle Protection	Blankets
Special Tools	Notes
None	
Installation Tools	Notes
Clean Terry Cloth	
Special Chemicals	Notes
Soapy Water	Liquid Soap & Water

General Applicability

Automatic Transmission only

Recommended Sequence of Application

Item #	Accessory
1	
2	
3	






*Mandatory

NOTE: Part number of this accessory may not be the same as the part number shown.

Vehicle Service Parts (may be required for reassembly)

Item #	Quantity Req.	Description
1		
2		
3		

Legend

	STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.
	OPERATOR SAFETY: Use caution to avoid risk of injury.
	CAUTION: A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.
	TOOLS & EQUIPMENT: Used in Figures calls out the specific tools and equipment recommended for this process.
	REVISION MARK: This mark highlights a change in installation with respect to previous issue.

Procedure


Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.




This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

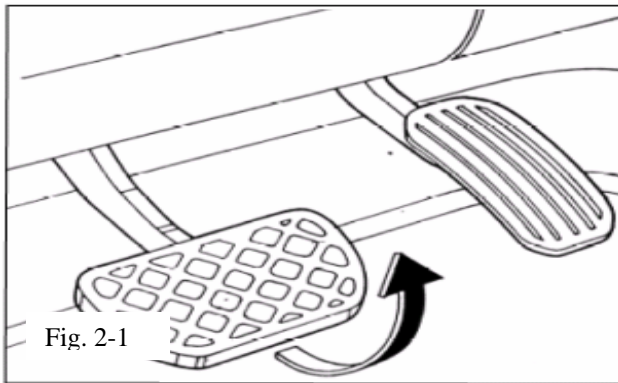Please see your Toyota dealer for a copy of this document.




1. Pre-installation Precautions

- (a) Vehicle engine is "OFF" and vehicle is on flat surface (not on an incline/decline).
-  (b) Engage parking brake.
-  (c) Engage transmission into Park.
-  (d) Place protective blanket over driver's side entry way and on top of driver's floor mat.


2. Remove OE Rubber Pedal Cover

- (a) Remove the OE rubber pedal cover(s) from the brake pedal. (Fig. 2-1)
- (b) Discard OE rubber pedal cover(s).

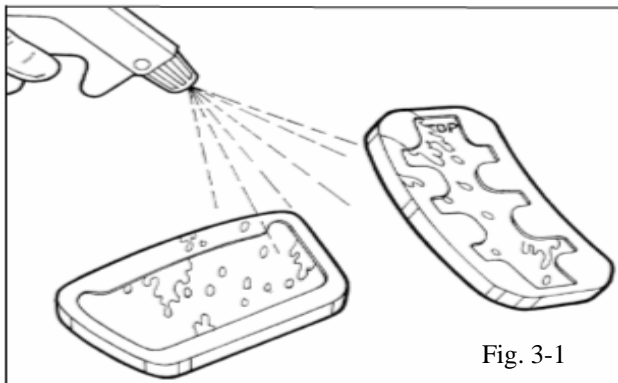

3. Install Accelerator Sport Pedal Cover

- (a) Lubricate the inside of the accelerator Sport Pedal Cover by spraying the soapy water mixture. (Fig. 3-1)

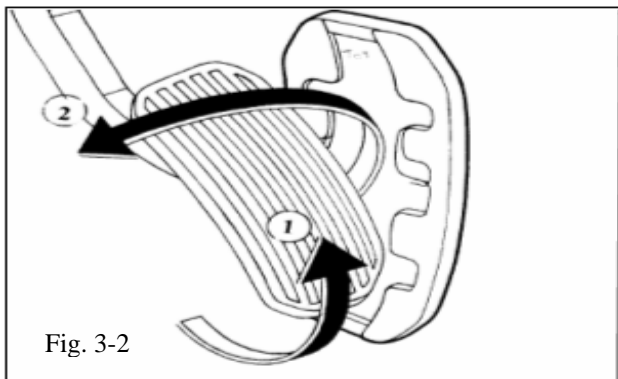

- (b) Place the accelerator Sport Pedal Cover over the OE accelerator (Fig. 3-2), and manipulate the installation by twisting and pushing the accelerator Sport Pedal Cover onto the OE accelerator until fully installed.

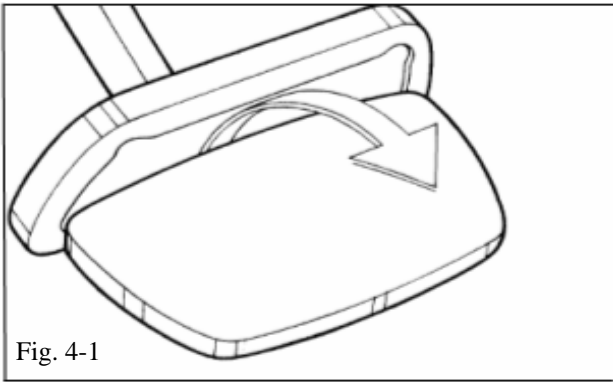


Fig. 4-1



Fig. 4-2

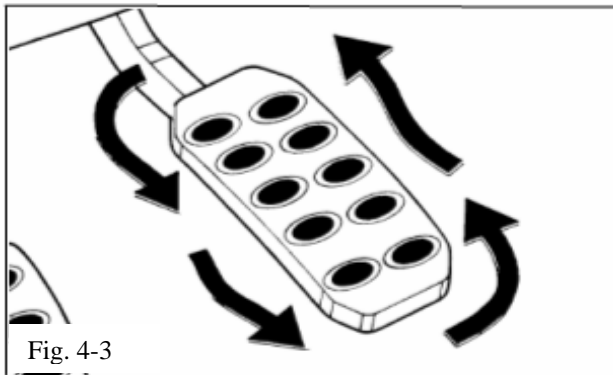


Fig. 4-3

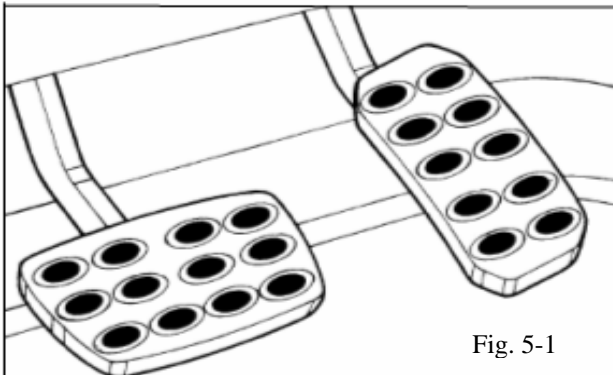


Fig. 5-1

4. Install Brake Sport Pedal

- (a) Lubricate the inside of the brake sport pedal cover by spraying the soapy water mixture. (Fig. 3-1)
- (b) Slip the brake sport pedal cover onto the OE metal surface, top edge completely across. (Fig. 4-1)
- (c) Pull the bottom lip outward and latch it onto the bottom edges shown. (Fig. 4-2)



NOTE: To ensure proper installation of the Sport Pedal Covers, make sure that all the rubber lips of the covers are securely wrapped around the OE pedal. Check this by running a finger along the backside perimeter of the pedal and by pulling up on the covers. (Fig. 4-3)

5. Clean Up

- (a) Using plain water, wipe down Sport Pedals to remove soap residue, fingerprints, etc. Refer to Fig. 5-1 for view of finished product. (Fig. 5-1)
- (b) Remove protective blankets from vehicle.

TOYOTA TUNDRA 2007 - SPORT PEDAL COVERS

Checklist - these points **MUST** be checked to ensure a quality installation.

Check:

Look For:

Accessory Function Checks

Accelerator and Brake Sport Pedals

Accelerator and Brake Sport Pedal should be completely wrapped around the backside of the OE Accelerator and Brake Pedals. Be sure to check that the lips are wrapped around the OE pedal by pulling up on the Sport Pedal assemblies.

Shifting or Looseness

Slight shifting or looseness is acceptable in the pedals, especially when the pedals are freshly lubricated.

OE Pedal Functionality

All OE Pedals should be engaged and disengaged to ensure proper functionality, and that there is no interference with floor pan, floor mats, etc.